Type 607Q/608Q Galvanised Transverse grate

Product Features

В

æ

Certified to AS 3996 Load Class B (80kN) (NATA endorsed load test reports available)

AS 3996 (Clause 3.3.7) compliant for bicycle tyre penetration resistance

- QuickLok boltless locking system
- Suitable for use with K200, KS200, H200K, H200KS channels
- Manufactured from galvanised steel



Specifications

The grate shall be ACO Type 607Q Galvanised Transverse grate with **QuickLok** boltless locking system as manufactured by ACO. This grate has an overall width of 238mm and overall length of 1000mm (Type 607Q) and 500mm (Type 608Q). Slot widths measure at a maximum of 30mm.

Materials & Design

The grate shall be manufactured from galvanised steel and have minimum properties and characteristics as follows:

- Manufactured from galvanised steel
- Certified to AS 3996 Load Class B (80kN)¹
- Meets AS 3996 (Clause 3.3.7)
- Intake area of 179,700mm² per metre of grate/87,720mm² per half metre of grate


 $^{\scriptscriptstyle 1}$ NATA endorsed test reports available

For the specification of the ACO Drain channel system selected, click: http://www.acodrain.com.au/product-support




ACO DRAIN®

Type 607Q/608Q Galvanised Transverse grate

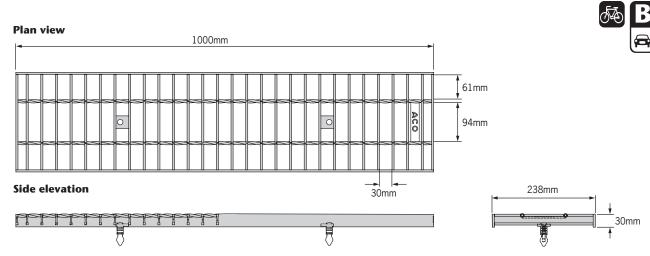

Description	Part No.	Length (mm)	Width (mm)	Weight (kg)
QuickLok grate Type 607Q Galvanised Transverse Type 608Q Galvanised Transverse Grate removal tool	142411 142412 01318	1000 500	238 238 -	7.8 4.2 0.1

Note: QuickLok bar/s included in grate Part Number.



ACO Pty Ltd Australia

> Ph: 1300 765 226 www.acodrain.com.au sales@acoaus.com.au



Ph: 0800 448 080 www.acodrain.co.nz sales@aconz.co.nz



© January 2022 ACO Pty Ltd. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Pty Ltd pursues a policy of continuous product development and reserves the right to amend specifications without notice.