

**SPECIFICATION CLAUSE**  
**SLABDRAIN H100SK - LOAD CLASS C-D**

**GENERAL**

THE SURFACE DRAINAGE SYSTEM SHALL BE ACO'S SLABDRAIN H100SK POLYMER CONCRETE SHALLOW CHANNEL SYSTEM WITH DUCTILE IRON EDGE RAILS AS MANUFACTURED BY ACO.

**MATERIALS**

H100SK CHANNELS SHALL BE MANUFACTURED FROM POLYESTER RESIN POLYMER CONCRETE WITH INTEGRALLY CAST-IN DUCTILE IRON EDGE RAILS. PROPERTIES OF POLYMER CONCRETE WILL BE AS FOLLOWS WITH SUPPORTING DOCUMENTATION:

COMPRESSIVE STRENGTH:	<b>98 MPa</b>
FLEXURAL STRENGTH:	<b>26 MPa</b>
TENSILE STRENGTH:	<b>14 MPa</b>
WATER ABSORPTION:	<b>0.07%</b>
FROST PROOF:	<b>YES</b>
COEFFICIENT OF EXPANSION/CONTRACTION:	<b>2.02x10<sup>-5</sup>/°C</b>
WATER VAPOUR TRANSMISSION:	<b>0.0364g/m<sup>2</sup></b>
NON FLAMMABLE:	<b>YES</b>
COEFFICIENT OF ROUGHNESS (MANNINGS):	<b>n=0.011</b>
RESISTANT TO WEATHERING:	<b>YES</b>
DILUTE ACID AND ALKALI RESISTANT:	<b>YES</b>
SF SEALANT GROOVE	<b>YES</b>

**CHANNELS**


H100SK CHANNEL SHALL BE 100mm NOMINAL INTERNAL WIDTH WITH AN OVERALL WIDTH OF 160mm. CHANNELS SHALL HAVE AN OVERALL DEPTH OF 100mm FOR USE IN AREAS WITH DEPTH RESTRICTIONS. ALL CHANNELS SHALL BE INTERLOCKING WITH A MALE/FEMALE JOINT.

**GRATES**

INSERT SPECIFICATION FOR THE SELECTED GRATE. REFER TO THE RELEVANT ACO SPECIFICATION INFORMATION SHEET.  
 CLICK: [www.acodrain.com.au/resources](http://www.acodrain.com.au/resources)

**INSTALLATION**

THE COMPLETE DRAINAGE SYSTEM SHALL BE BY ACO AND TO BE INSTALLED FOR ITS INTENDED PURPOSE. ANY DEVIATION OR PARTIAL USE OF THE SPECIFIED SYSTEM AND/OR IMPROPER INSTALLATION WILL VOID ALL WARRANTIES PROVIDED BY ACO.

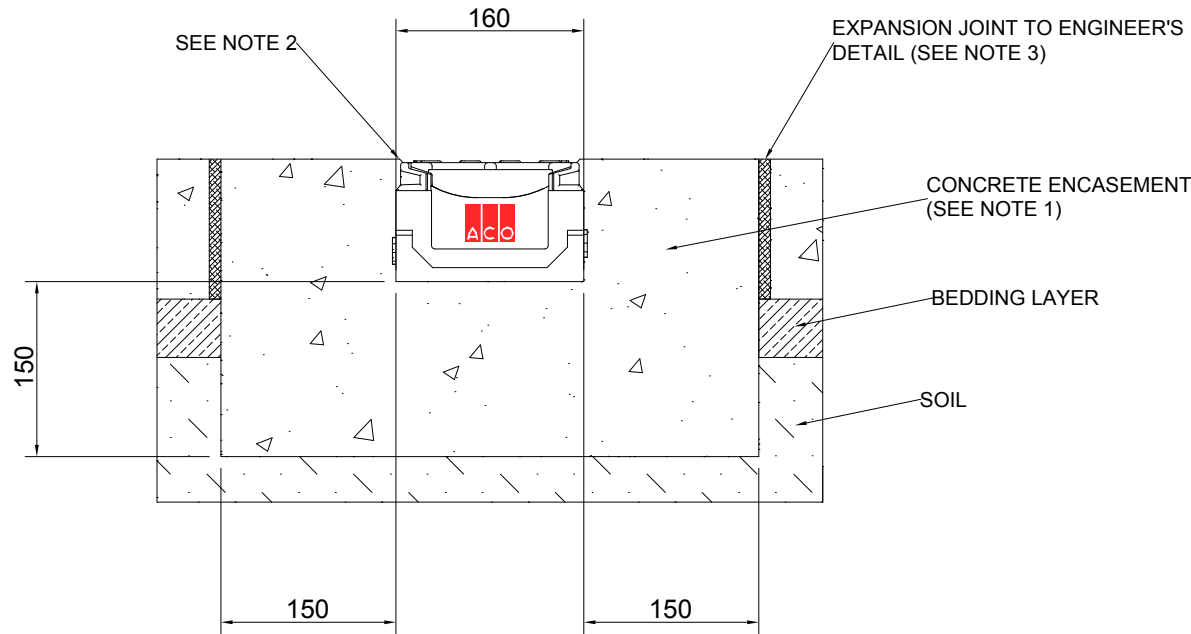

**NOTES:**

1. Specific site conditions may require an increase in the concrete encasement dimensions and/or reinforcement. It is the customer's responsibility to ensure the concrete encasement is designed for the application. A minimum concrete strength of 25MPa is recommended. The concrete should be vibrated to eliminate air pockets. *Engineering advice may be required.*
2. The finished level of the concrete encasement must be approximately 3mm above the top of the channel edge.
3. Expansion and crack control joints are recommended to protect the channel and the concrete encasement. *Engineering advice may be required.*
4. For further details, refer to ACO's design & site installation files at [www.acodrain.com.au/resources](http://www.acodrain.com.au/resources)

HS1K-CD-C

**H100SK - SLABDRAIN - LOAD CLASS: C-D**  
**FOR CONCRETE SLAB**



DATE: 01/14

**INSTALLATION DRAWING - ACO DRAIN**

ACO Polycrete Pty Ltd  
 Australia  
 Ph: 1300 765 226  
[www.acodrain.com.au](http://www.acodrain.com.au)

ACO Limited  
 New Zealand  
 Ph: 0800 448 080  
[www.acodrain.co.nz](http://www.acodrain.co.nz)