



This grate is part of ACO's Heelsafe® Anti-Slip range. For more information visit [www.heelsafe.com.au](http://www.heelsafe.com.au)


**Product Features**

- Certified to AS 3996 Load Class B (80kN) (NATA endorsed load test reports available)
- AS 3996 (Clause 3.3.6) compliant for surface openings in pedestrian areas ASME A112.6.3 (Section 7.12) compliant - American high heel standard
- AS 4586: P3 – Slip resistance classification for Wet Pendulum Test AS 4586: R10/R12<sup>1</sup> - Slip resistance classification for Oil-Wet Inclining Platform Test
- AS 1428.1 (Clause 4.4b)<sup>2</sup> compliant for wheelchair and walking cane safety
- AS 3996 (Clause 3.3.7) compliant for bicycle tyre penetration resistance

- Raised transverse bars for tread durability
- No end bars for visual continuity
- **DrainLok** barless and boltless locking system
- Suitable for use with K100, KS100, H100K, H100KS channels
- Manufactured from galvanised steel

<sup>1</sup> Test direction (perpendicular/parallel) relative to the grate's length (NATA endorsed test reports available)

<sup>2</sup> Dominant direction of travel perpendicular to the grate's length

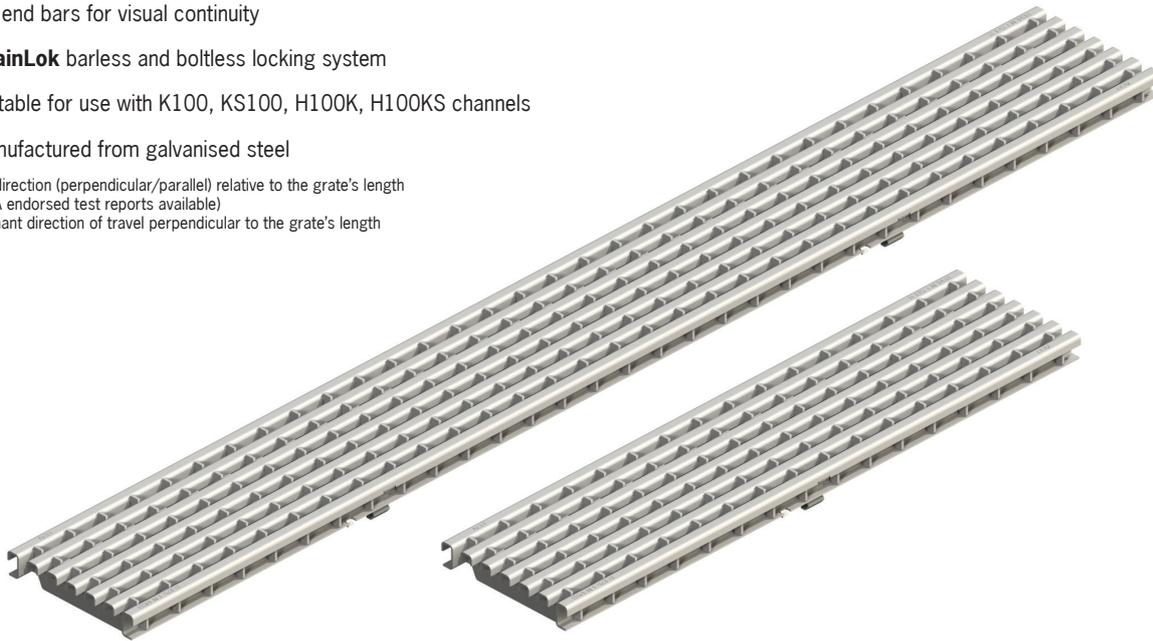

**Specifications**

The grate shall be ACO Type 438D Galvanised Longitudinal Heelsafe® Anti-Slip grate with DrainLok barless and boltless locking system as manufactured by ACO. This grate has an overall width of 123mm and overall length of 1000mm (Type 438D) and 500mm (Type 437D). Slot widths measure at a maximum of 8mm.

**Materials & Design**

The grate shall be manufactured from galvanised steel and have minimum properties and characteristics as follows:

- Raised transverse bars for tread durability
- No end bars for visual continuity
- Manufactured from galvanised steel
- Certified to AS 3996 Load Class B (80kN)<sup>2</sup>
- AS 4586: P3 – Slip resistance classification for Wet Pendulum Test<sup>2</sup>
- AS 4586: R10/R12<sup>1</sup> – Slip resistance classification for Oil-Wet Inclining Platform Test<sup>2</sup>
- Meets AS 1428.1 (Clause 4.4b)<sup>3</sup>; AS 3996 (Clause 3.3.6 & 3.3.7); ASME A112.6.3 (Section 7.12)
- Intake area of 45,600mm<sup>2</sup> per metre of grate/22,800mm<sup>2</sup> per half metre of grate

<sup>1</sup> Test direction (perpendicular/parallel) relative to the grate's length

<sup>2</sup> NATA endorsed test reports available

<sup>3</sup> Dominant direction of travel perpendicular to the grate's length

For the specification of the ACO Drain channel system selected, click: <http://www.acodrain.com.au/product-support>




**ACO DRAIN®**

**Type 438D/437D Galvanised Longitudinal Heelsafe® Anti-Slip grate**



**Plan view**

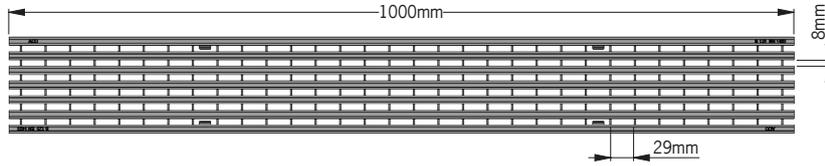


**Side elevation**



Description	Part No.	Length (mm)	Width (mm)	Weight (kg)
<b>DrainLok grate</b>				
Type 438D Galvanised Longitudinal Heelsafe® Anti-Slip	<b>132555</b>	1000	123	4.0
Type 437D Galvanised Longitudinal Heelsafe® Anti-Slip	<b>132550</b>	500	123	2.1
Grate removal tool	<b>01318</b>	-	-	0.1

**'DrainLok' locking mechanism**

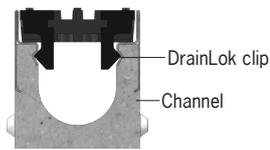

ACO DrainLok™ is a patented, boltless locking system that removes the need for bolts and bars and improves the hydraulic capacity of the channel. The DrainLok™ mechanism simply clips into the channel edge rail for rapid installation. ACO DrainLok™ grates are fitted with an anti-shunt mechanism that restricts unwanted grate movement when installed, improving durability and longevity of the system.

**ACO Pty Ltd  
Australia**  
Ph: 1300 765 226  
www.acodrain.com.au  
sales@acoaus.com.au

**ACO Limited  
New Zealand**  
Ph: 0800 448 080  
www.acodrain.co.nz  
sales@aconz.co.nz



© January 2022 ACO Pty Ltd. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Pty Ltd. pursues a policy of continuous product development and reserves the right to amend specifications without notice.