






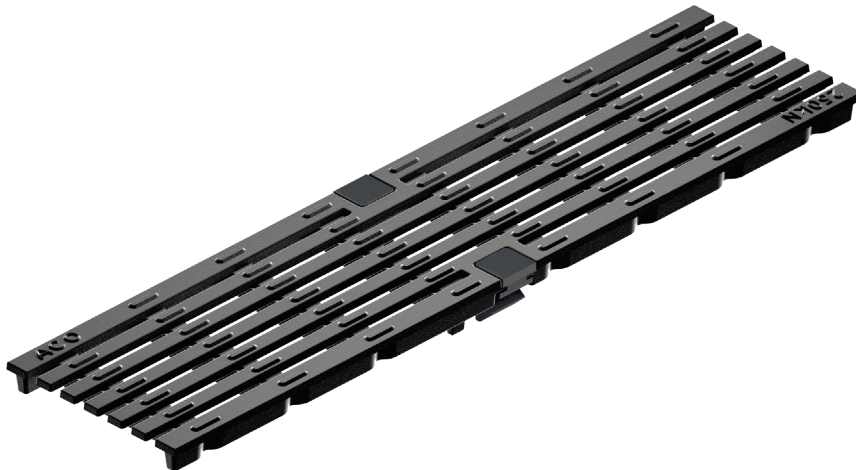


This grate is part of ACO's Heelsafe® Anti-Slip range. For more information visit www.heelsafe.com.au

Product Features

-  Certified to AS 3996 Load Class D (210kN) (NATA endorsed load test reports available)
 -  AS 3996 (Clause 3.3.6) compliant for surface openings in pedestrian areas
ASME A112.6.3 (Section 7.12) compliant - American high heel standard
 -  AS 4586: P2 – Slip resistance classification for Wet Pendulum Test
AS 4586: R10/R9¹ - Slip resistance classification for Oil-Wet Inclining Platform Test
 -  AS 1428.1 (Clause 4.4c) compliant for wheelchair and walking cane safety
 -  AS 3996 (Clause 3.3.7) compliant for bicycle tyre penetration resistance
- **DrainLok** barless and boltless locking system
 - Suitable for use with K100, KS100, H100K, H100KS channels
 - Manufactured from ductile iron to AS 1831 Grade 500-7

¹ Test direction (perpendicular/parallel) relative to the grate's length (NATA endorsed test reports available)



Specifications

The grate shall be ACO Type 476D Iron Intercept Heelsafe® Anti-Slip grate with DrainLok barless and boltless locking system as manufactured by ACO. This grate has an overall width of 123mm and overall length of 500mm. Slot widths measure at a maximum of 6mm.

Materials & Design

The grate shall be manufactured from ductile iron and have **minimum** properties and characteristics as follows:

- Manufactured from ductile iron to AS 1831 Grade 500-7
- Certified to AS 3996 Load Class D (210kN)²
- AS 4586: P2 – Slip resistance classification for Wet Pendulum Test²
- AS 4586: R10/R9¹ – Slip resistance classification for Oil-Wet Inclining Platform Test²
- Meets AS 1428.1 (Clause 4.4c); AS 3996 (Clause 3.3.6 & 3.3.7); ASME A112.6.3 (Section 7.12)
- Intake area of 14,780mm² per half metre of grate

¹ Test direction (perpendicular/parallel) relative to the grate's length

² NATA endorsed test reports available


For the specification of the ACO Drain channel system selected, click: <http://www.acodrain.com.au/product-support>

ACO Specification Information






Plan view

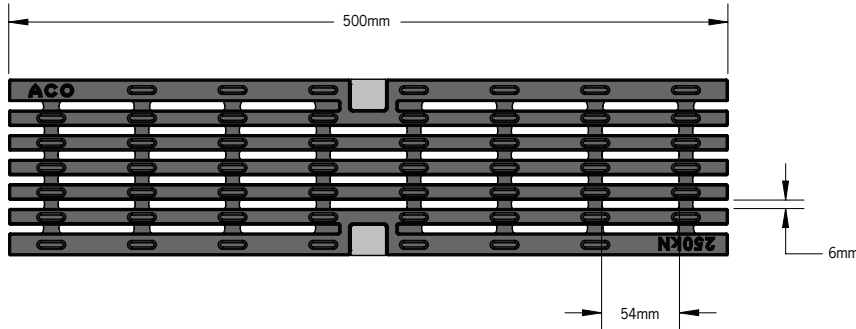


Side elevation

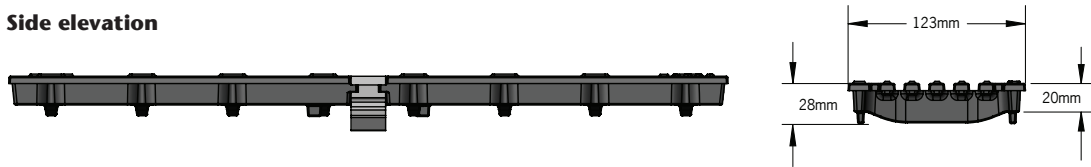

Description	Part No.	Length (mm)	Width (mm)	Weight (kg)
DrainLok grate Type 476D Iron Intercept Heelsafe® Anti-Slip	142171	500	123	3.8
Grate removal tool	01318	-	-	0.1

'DrainLok' locking mechanism

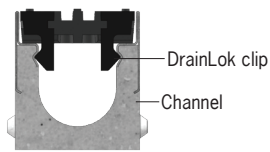

ACO **DrainLok™** is a patented, boltless locking system that removes the need for bolts and bars and improves the hydraulic capacity of the channel. The **DrainLok™** mechanism simply clips into the channel edge rail for rapid installation. ACO **DrainLok™** grates are fitted with an anti-shunt mechanism that restricts unwanted grate movement when installed, improving durability and longevity of the system.

ACO Pty Ltd
Australia
Ph: 1300 765 226
www.acodrain.com.au
sales@acoaus.com.au

ACO Limited
New Zealand
Ph: 0800 448 080
www.acodrain.co.nz
sales@aconz.co.nz

